

S4726E/4732E

ELECTRIC SLAB SCISSOR LIFTS



- Self-propelled electric scissor lifts
- Compact & robust
- Roll-out extension decks for extra reach
- Suitable for indoor and outdoor use
- Ideal for construction & maintenance applications

 **snorkel**
www.snorkellifts.com

ELECTRIC SLAB SCISSOR LIFTS S4726E/4732E



DIMENSIONS	S4726E	S4732E
Max. working height	9.9m	11.8m
Max. platform height (A)	7.9m	9.8m
Platform size (stowed)	1.09m x 2.14m	1.09m x 2.14m
Platform size (extended)	1.09 x 3.36m	1.09 x 3.36m
Deck extension length (B)	1.21m	1.21m
Overall length (with step) (D)	2.3m	2.3m
Overall length (without step)	2.26m	2.26m
Overall width (C)	1.19m	1.19m
Stowed height (E)	2.3m	2.39m
Min. height (guardrails folded)	1.85m	1.95m
Ground clearance (stowed)	66mm	66mm
Ground clearance (elevated)	19mm	19mm

PERFORMANCE		
Platform capacity	454kg	318kg
Max. drive height	7.9m	9.8m
Max. wind speed	12.5m/s	12.5m/s
Max. drive speed (stowed)	3.2km/h	3.2km/h
Max. drive speed (elevated)	0.6km/h	0.6km/h
Raise/lower time	50/58 sec	50/58 sec
Gradeability	25%	25%
Inside turning radius	0.53m	0.53m
Outside turning radius	2.41m	2.41m
Tires	15in x 5in non-marking rubber	
Controls	proportional	
Drive system	2 wheel drive	

POWER		
Power source	24V DC battery electric	
Charger	90 - 240V 25amp	

WEIGHT		
Weight	2,154kg	2,585kg

TURNING RADIUS

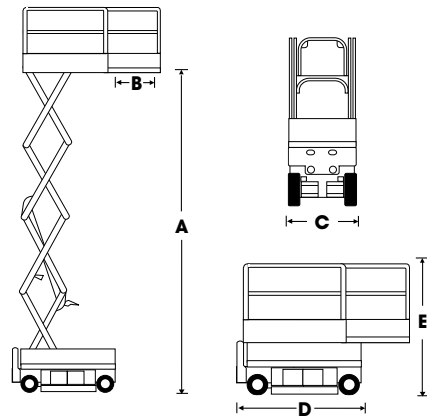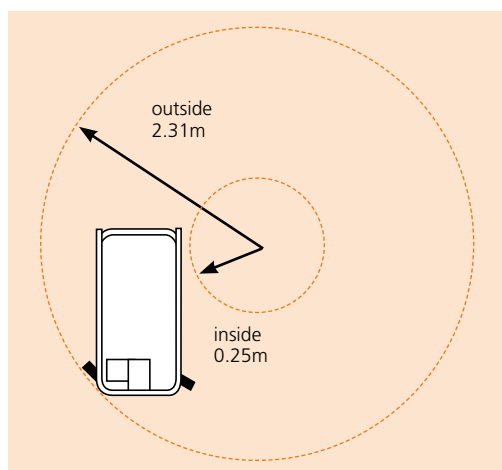

STANDARD FEATURES

- Roll-out deck extension with dual locks
- Non-marking tyres
- Swing-out service trays
- Saloon-door style entry gates
- Descent alarm
- All motion alarm
- Key switch
- Scissor stack roller slide plates (set of 2)
- 2 person indoor
- 1 person outdoor
- Loading pendant
- Proportional controls, including descent
- Power line to platform
- Hour meter & onboard diagnostics display
- Integrated battery charger
- Battery condition indicator
- Crane & forklift points
- Dual lanyard attachments points
- 2 year parts & labor, 5 year structural warranty
- ANSI compliant

OPTIONS

- Special paint colors
- Airline to platform
- Aircraft bumpguard package
- Panel carrier
- Flashing amber light
- 110V AC 800W inverter
- Environmental hydraulic oil
- Platform overload system
- Snorkel Guard™ secondary guarding system
- CSA compliant

snorkel www.snorkellifts.com

P.O. Box 1160
 St. Joseph, MO 64502-1160, USA
 Tel: 1 (785) 989-3000
 Toll-free: 1 (800) 255-0317
 Fax: 1 (785) 989-3070
 Email: sales.usa@snorkellifts.com